

## Technical data



- Nominal torque: 10.000 Nm to 25.000 Nm, bidirectional
- Customer-specific calibration upon request
- Rotational speed:  $\leq 8.000$  rpm
- Accuracy:  $\leq \pm 0,5$  %
- Temperature range:  $-30$  °C to  $+85$  °C
- Protection class: IP50, IP65
- Output signals: 0-10 V/4-20 mA/CAN-Bus/USB
- Output frequency: 2.500 Hz

## Your advantages

- Made in Germany (nearby Munich, Bavaria)
- Delivery ex warehouse (< two weeks)
- Best price-performance ratio
- Integrated electronic (Plug & Play)
- Contactless measurement system
- Including 5 m cable and calibration certificate

### Short description

The series 5000 is special build for high torque measurements ( $\geq 10.000$  Nm; already obstructed up to 150.000 Nm).

This series is mainly used in high performance automotive test facilities, rail applications, component stress testing and process control of heavy lift charge or container transshipment. Additional fields of applications are professional testing constructions and quality control in general.

Transmitted torque can be measured statically and dynamically in real time. Each sensor can be configured individually with a lot of extras, such as customized nominal torque, angle sensor and protection class IP65.

Series 5000 offers a wide range of output signals such as 0-10 V, 4-20 mA, CAN-Bus or USB. USB is offered including a special NCTE software enables to show data in real time.

The sensor is provided as a complete unit with integrated evaluation electronic, including 5 m cable, keystones (Round shaft) and calibration certificate.

**Model series 5000**

Series 5000	Unit	Nominal torque bidirectional (+/-)	Max. load bidirectional (+/-)	Rotational speed [rpm]
<b>1</b>	[Nm]	10.000 – 15.000	20.000	8.000
<b>2</b>	[Nm]	20.000 – 25.000	30.000	5.000
<b>3</b>	[Nm]	Customer-specific calibration	Available on request	Available on request

## Technical characteristics

No.	Model	Unit	Series 5000	
	Accuracy class <sup>1</sup>		0,5	
		Unit	Value	
1	Linearity deviation incl. hysteresis	%ME <sup>2</sup>	< ±0,5	
2	Rotational Signal Uniformity (RSU)		< ±0,5	
3	Repeatability		< ±0,1	
Output signal in general		Unit	Value	
4	Frequency range, -3dB point, Bessel characteristics	Hz	2.500	
5	Analog signal	V   mA	0 ... 10	4 ... 20
6	Signal at torque = Zero <sup>3</sup>	V   mA	5	12
7	Signal at positive nominal torque <sup>3</sup>	V   mA	5	20
8	Signal at negative nominal torque <sup>3</sup>	V   mA	5	4
9	Calibration parameter (normed) <sup>3</sup>	V/Nm mA/Nm	4 V/Measurement range	8 mA/Measurement range
10	Error output	V   mA	10	22
11	Output resistance	Ω	50	
Effect of temperature		Unit	Value	
12	Zero point drift over temperature	%/10 K	< 0,5	
13	Signal drift over temperature within nominal temperature range	%/10 K	< 0,5	
Power supply		Unit	Value	
14	Supply voltage	VDC	9 ... 28	
15	Current consumption (max.)	mA	40	
16	Start-up peak	mA	< 100	
17	Absolute max. supply voltage	VDC	30	
General information		Unit	Value	
18	Protection class according to EN 60529 <sup>4</sup>	IP	50/65	
19	Reference temperature	°C	+15 ... +35	
20	Operational temperature range	°C	-40 ... +85	
21	Storage temperature range	°C	-40 ... +85	
22	Bearing operating hours	h	approx. 20.000	


<sup>1</sup> The accuracy class implies that taken separately both the linearity deviation as well as the rotational signal uniformity are either lower than or equal to the value of the accuracy class.

<sup>2</sup> %ME: related to a full scale measurement range.

<sup>3</sup> Please check the exact data at the sensors calibration certificate.


<sup>4</sup> Wiring connected.

**Dimensions**

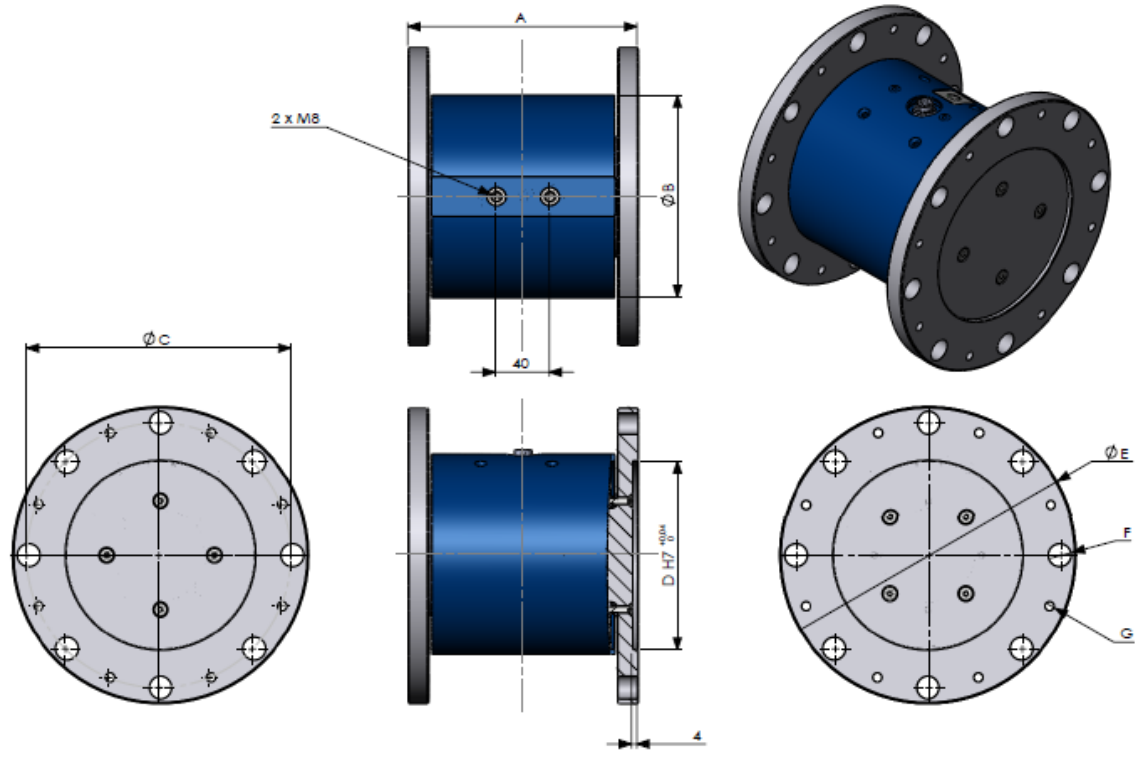

Dimensions (in mm)		
	10.000 – 15.000	20.000 – 25.000
A	170	200
B	150	190
C	196	288
D	140	174
E	220	326
F	17	19
G	-	-
Screws	8x M12, 10.9	16 x M18, 10.9
Tightening torque	125 Nm	210 Nm


**Connection plan**

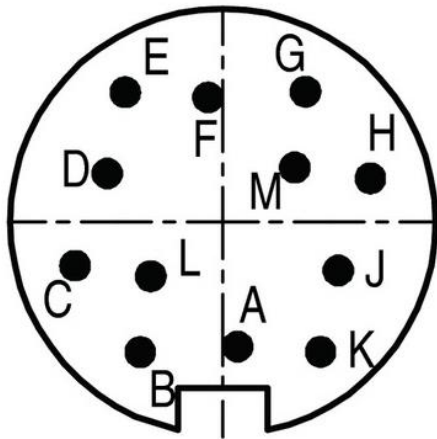


Connector  
Power supply and outputs

Binder series M16 connector IP67 Item-No.: 09-0131-90-12 color code according to DIN 47100			
Typ	Colour	Description	Value
A	White	CAN/USB	H/D-
B	Brown	CAN/USB	L/D+
C	Green	Angle Channel A	0 ... 5 V
D	Yellow	Angle Channel B	0 ... 5 V
E	Grey	Analog GND	-
F	Pink	Analog voltage Analog current	0 ... 10 V 4 ... 20 mA
G	Blue	Ground GND	-
H	Red	Supply voltage VCC	9 ... 28 V
J	Black	USB GND	-
K	Violet	-	-
L	Grey-Pink	USB	+5 V
M	Red-Blue	-	-

Connection example:

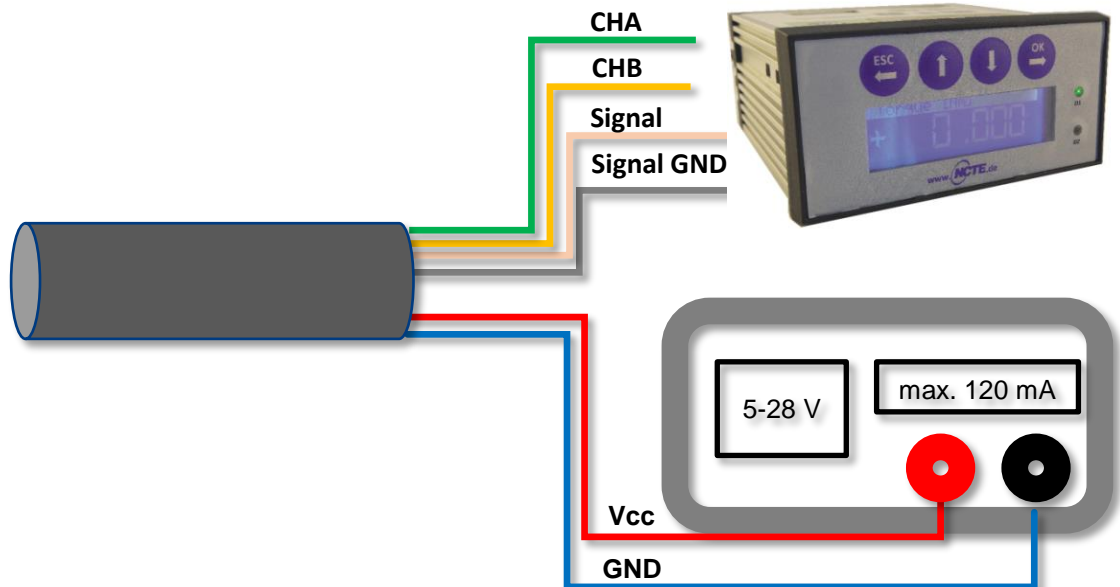


Angle sensor

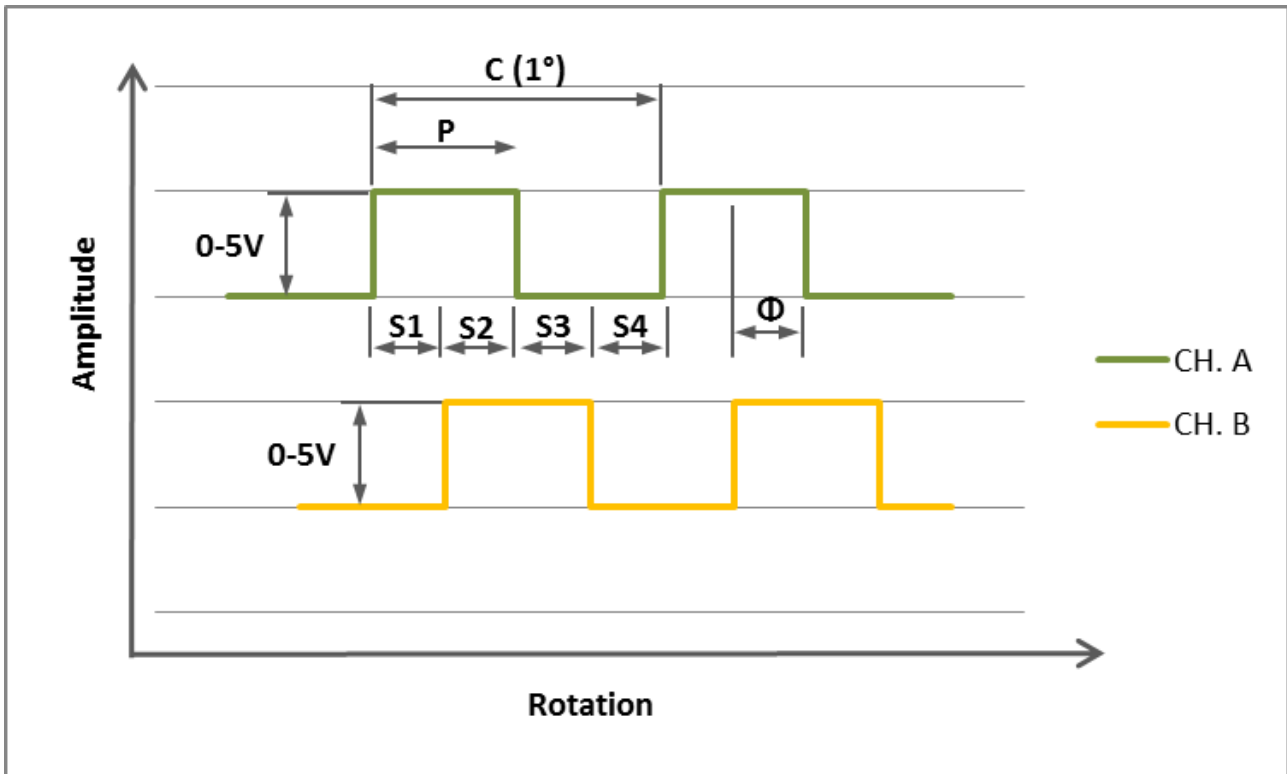

Parameter	Min.	Typ.	Max.	Units
High Level Output Voltage	2,4	5	-	V
Low Level Output Voltage	0	-	0,4	V
Parameter	Description			
C	One cycle of 360 CPR (degrees)			
P	The duration of high state of the output within one cycle.			
S	The number of electrical degrees between a transition in Channel A and the neighboring transition in Channel B.			
Φ	The number of electrical degrees between the center of high state of Channel A and the Center of high state of Channel B.			

**Speed sensor**

Magnetic (Hall Effect) speed sensor with 1 CPR or 60 CPR.

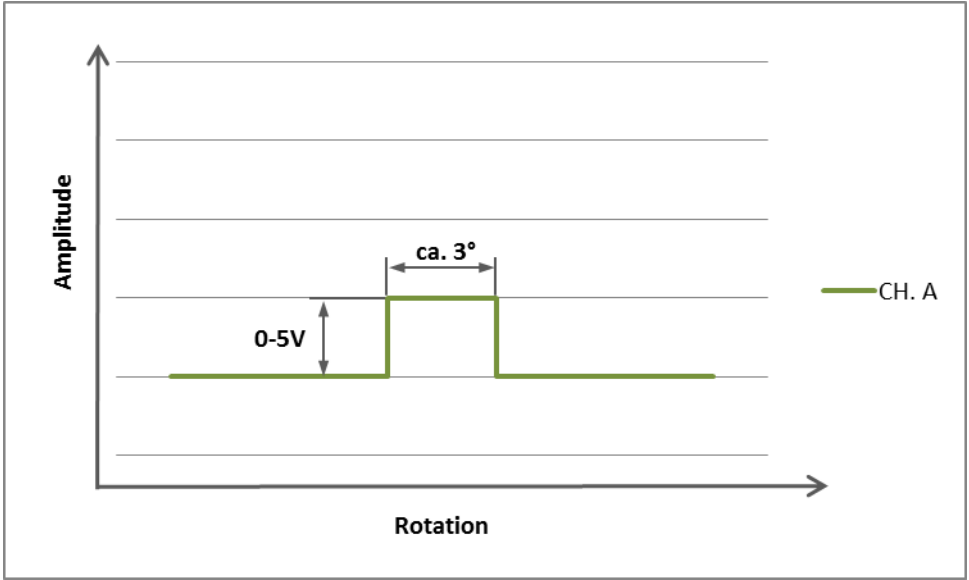

Parameter	Min.	Typ.	Max.	Unit
Operating frequency	0	-	8.000	Hz
Analog band width	20	40	-	kHz
High Level Output Voltage	2,4	5	-	V
Low Level Output Voltage	-	0	0,4	V

**Order options**

Series 5000 accuracy 0,5 %		Price
<b>Measurement range</b>		
10	kNm including 5 m cable and calibration certificate	
15	kNm including 5 m cable and calibration certificate	
20	kNm including 5 m cable and calibration certificate	
25	kNm including 5 m cable and calibration certificate	
XX	kNm including 5 m cable and calibration certificate Price on request	
<b>Angle sensor</b>		
0	Without angle sensor	
1	Speed sensor 1CPR	
2	Speed sensor 60CPR	
3	Angle sensor 1024 PPR (only with IP50)	
<b>Analog output</b>		
A	Voltage output 0-10 V	
S	Current output 4-20 mA	
<b>Shaft ends (optional)</b>		
U	USB incl. NCTE Software and 2,8 m cable	
C	CAN-Bus (only with speed sensor)	
<b>Protection class according to EN 60529</b>		
0	IP50	
1	IP65	
5000		

Please feel free to contact your Sales Manager Serial products for additional information. Email: [ntt@ntt.dk](mailto:ntt@ntt.dk)